





KEY FEATURES

- Furniture is recessed into the wall to prevent damage and minimize ligature risks
- Products are to be secured to a timber frame within the wall for strength
- Reduces the risk of concealment/stashing
- Single piece construction is impervious to water - cannot be damaged by fluids
- Preserves line of sight for staff conducting welfare checks
- Creates a room with uncluttered floor space
- Safely rounded corners



MATERIAL/FABRICATION

Rotationally molded, durable polyethylene, one-piece construction provides excellent strength and stability. Flamed, textured finish further strengthens the fire-retardant, water-resistant, UV-stabilized shell. Anti-microbial material gives high chemical resistance (e.g. ammonia, sodium hydroxide) throughout the product. Item is fully recyclable as polyethylene can be melted down to create a whole new product.

TEST STANDARDS

- Fire retardant to CAL 133 and UL 94 HB, Crib 5, DIN 66084
- UV resistance tested to UV 21+ stating it can withstand 21,000 sunlight hours
- Antibacterial Activity MOD ISO 22196: 2011
- Ryno ISO 11925 (2020)

ASSEMBLY

Arrives assembled and ready to be installed/fitted on-site.

OPTIONS

- Other products available in the Ryno Recessed range
- Optionally made with 40% reused content
- Lime Green (LG) and Vegas Yellow (VY) colors have a minimum order quantity of 12 units
- Available with Wardrobe (with storage/ hanging space)

1RRYOWH
74H | 27.5W | 20.1D (in)
64lb



COLOR/FINISH

Moonwalk Gray

Cool Green

Sand

Dusty Blue

Warm Terracotta

Lime Green

Granite

Dusty Pink

Thunder Gray

Violet Purple

Vegas Yellow

Teal

Icon Purple

Epic Blue

these colors have a minimum order quantity of 12 units

CORE COLORS

NON-CORE COLORS

INSTALLATION/FITTING

Wall installation solution - We recommend fitting to be completed by our skilled installation team. For more information and detailed installation instructions please refer to our '**Ryno Recessed - User Guide**'. Please be mindful that incorrect fitting methods, may cause an unsafe environment and void your warranty.

MAINTENANCE

Avoid using abrasive materials or cleaning agents, solvents, steam cleaning or jet washing. Use bleach and chlorine disinfectant with caution and avoid placing in close proximity to sources of heat. Read more on our website.

WARRANTY

Lifetime guarantee against all manufacturing faults.



DISCLAIMER

Extreme temperature changes (e.g. a cold night followed by a warm sunny day) may cause air inside the product to expand, causing short-term changes to its shape

Due to the nature of the rotational molding process, flat surfaces on Ryno® products may feature slight undulations which do not detract from the product's strength or durability.

RYNO[®] RECESSED MODULAR

1RRYOWS
71.1H | 18W | 21D (in)
Standard weight: 41.9lb

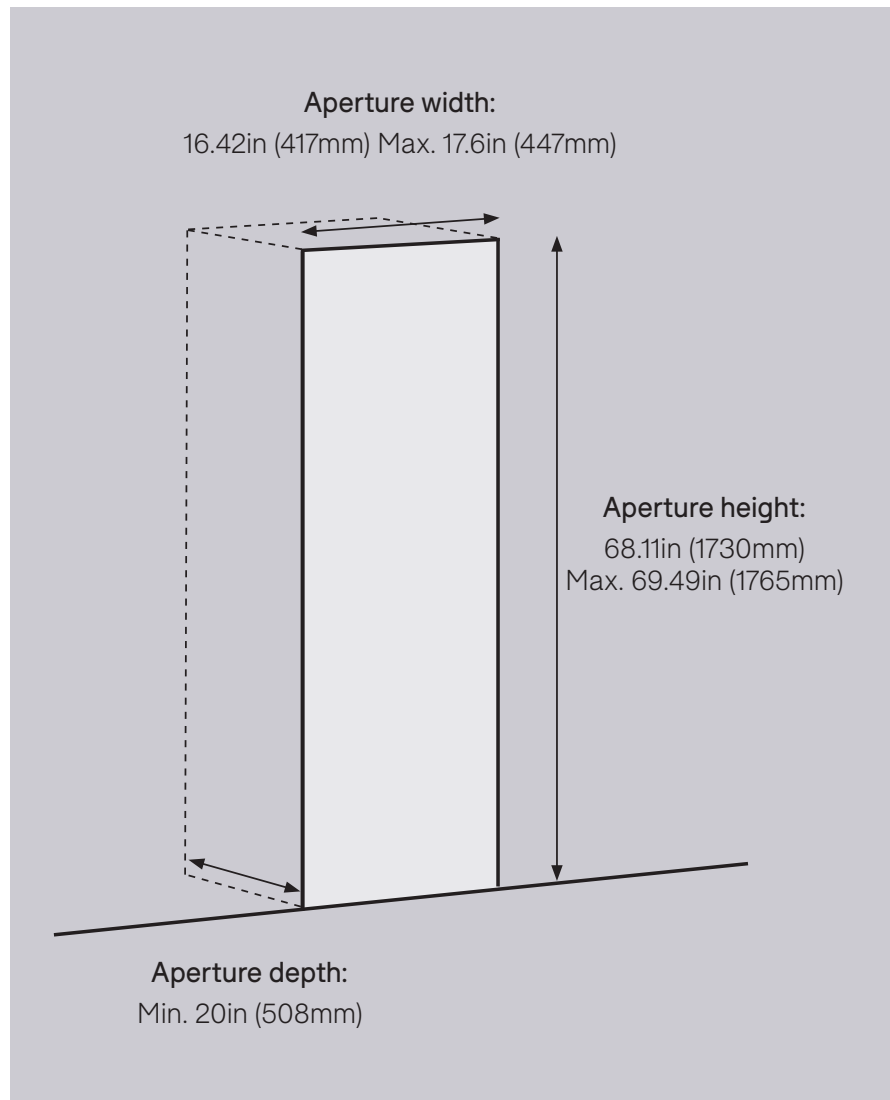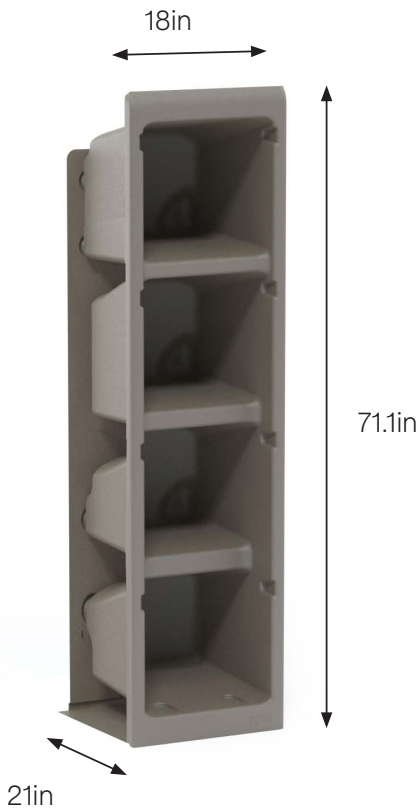

T
E
W

800.496.9324
inquiries@pineapplecontracts.com
us.pineapplecontracts.com

Pineapple